

SDE34

32 kg Self-contained Ice Cuber

SIMAG

Other models in this range: SDE18 - SDE24 - SDE 30 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

Technical Features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a

24 Hour Ice Production - 10°C/10° C

Air Cooled 32 kg No. of cubes 1520

Water Cooled 28 kg No. of cubes 1330

Bin Capacity

kg 10

Warranty

3 years warranty on components

Voltage

230/50/1 standard version

220-240/60/1 on demand



Technology and Certifications



Certified ISO 9001



21 g



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SDE34

32 kg Self-contained Ice Cuber



Other models in this range: SDE18 - SDE24 - SDE 30 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

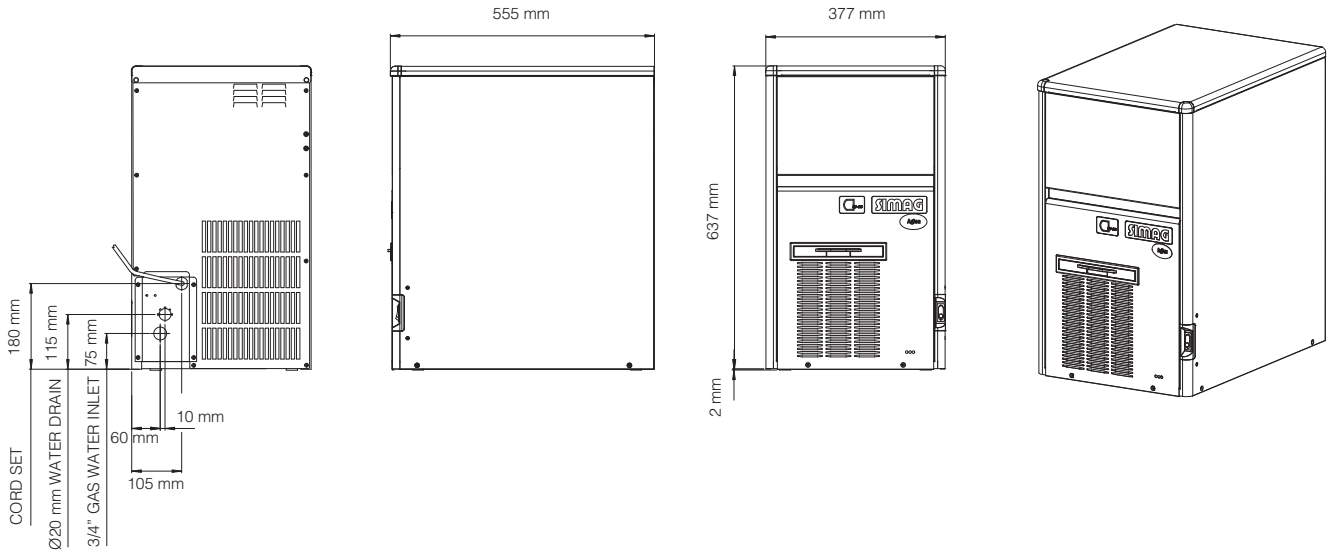

* DRAINAGE PER GRAVITY



CONTROL BOARD



SPRAY BAR
New spray bar with nozzles in fixed position



MAIN SWITCH
New embedded main switch



CLEANING SYSTEM
Easy cleaning of water pump filter



VENTILATING GRILLE
New ventilating grille in water cooled version



TOP ANGLE
New top plastic round corners



AIR FILTER
New condenser air filter for air cooled version

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SDE 34 AS	230/50/1	360	R134a	0,21	10	4,6	40	n.a.
SDE 34 AS	220-240/60/1	360	R134a	0,21	10	4,6	40	n.a.
SDE 34 WS	230/50/1	250	R134a	0,19	10	34,6	40	n.a.
SDE 34 WS	220-240/60/1	250	R134a	0,19	10	34,6	40	n.a.

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water